



# DIAPHRAGM VALVE

DN	INCHES	eC	PN10/16	eD ANSI125/150	B	A	DIN3202	BS5156	eF	E	WEIGHT
32	1 1/4"	120	140	118	163	180	146	78	2	8	
40	1 1/2"	120	150	127	164	200	159	88	3	8,5	
50	2"	160	165	153	195	230	190	102	3	12,5	

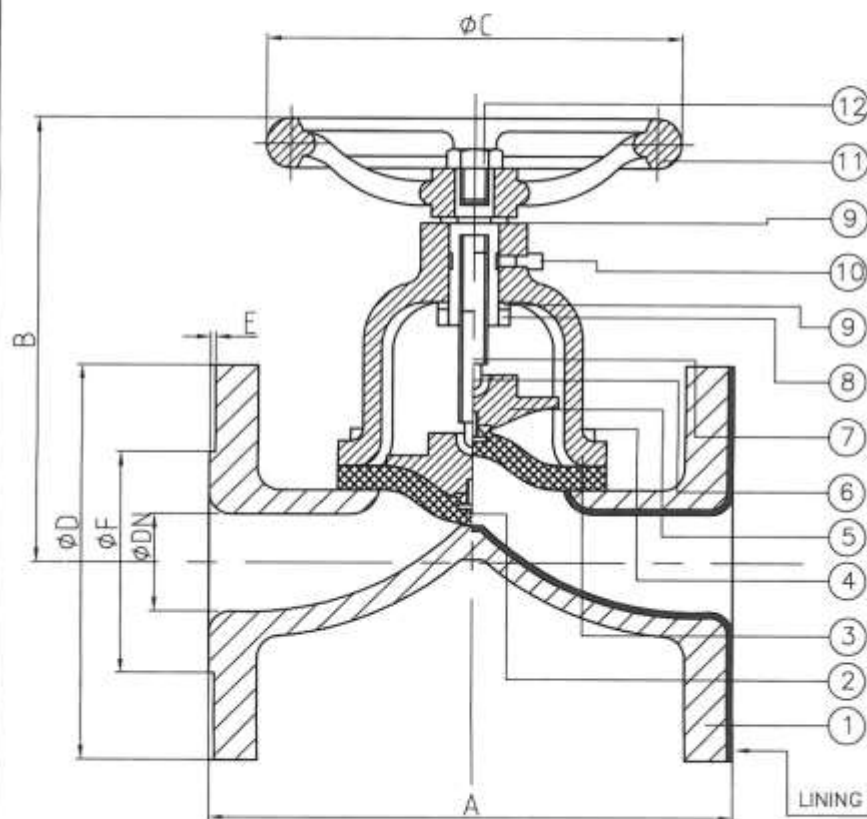

## MODEL

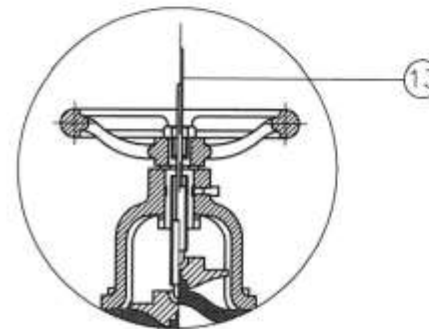

REF	DENOMINATION	MATERIAL
1	Body	Cast iron GG25*
2	Diaphragm	Rubber*
3	Bonnet	Cast iron GG25*
4	Union studs	Steel
5	Compressor	Cast iron GG25
6	Pin	Stainless Steel
7	Stem	SS303
8	Stem nut	F212
9	Washer	Brass
10	Greasing	Standard
11	Handwheel	Cast iron GG25*
12	Handwheel fix stud	Steel
13	Indicator	F212

BODY MATERIAL	RUBBER MATERIAL	LINING
Cast iron GG25	Butyl (BU)	Antigraze rubber
Ductil iron GGG40	EPDM (EP)	Butyl
Ductil iron GGG50	Hypalon (HY)	Ebonite
AISI316 (CF8M)	Natural rubber (BL)	Halar (ECTFE)
AISI316L (CF3M)	Neopreno (NE)	Hypalon
AISI304 (CF8)	Nitrile (NBR)	Neopreno
AISI304L (CF3)	PTFE (TE)	Rilsal
ASTM A216/WCB	Reinforced butyl (BUR)	Teflon
Bronze	Silicone (SI)	
Chromo 20%	Viton (VI)	
Carpenter 20		

MAX WORKING PRESSURES: 10Kg/cm2

reserves the right to modify the measures without previous notice