
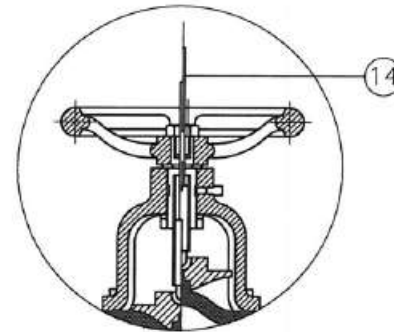


DIAPHRAGM VALVE

DN	INCHES	Ø C	Ø D		B	A		Ø F	E	WEIGHT
			PN10/16	ANSI/25/150		DIN3202	BS5156			
100	4"	250	220	228	314	350	305	158	3	36,5
125	5"	250	250	254	339	400	356	188	3	46,5
150	6"	350	285	280	383	480	406	212	3	80

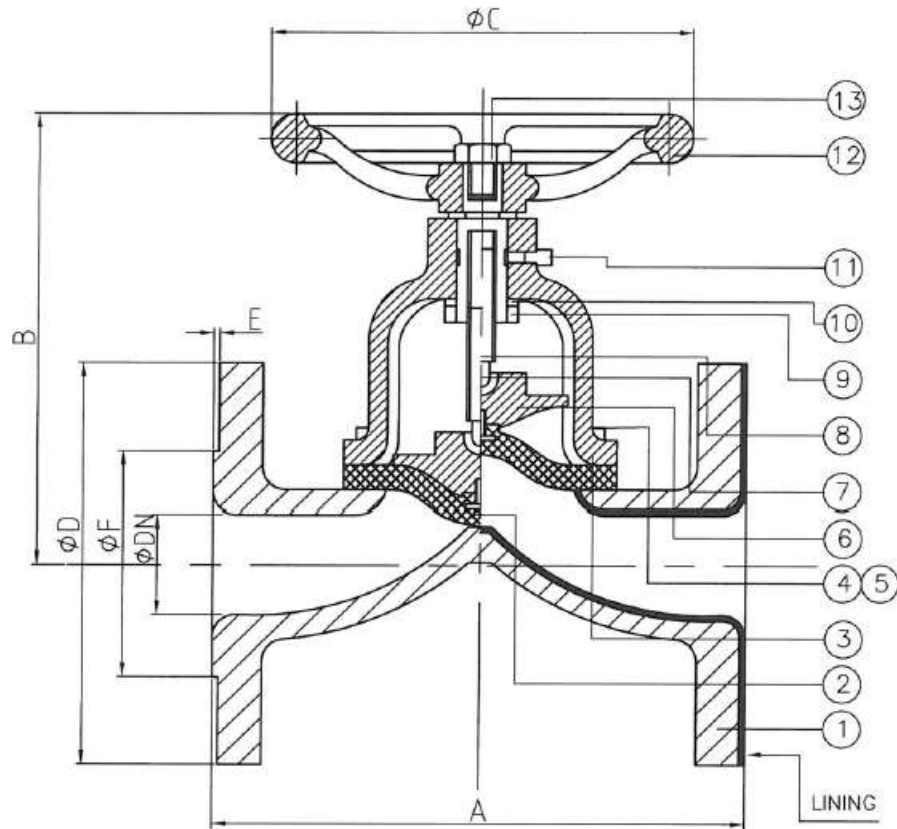

REF	DENOMINATION	MATERIAL
1	Body	Cast iron GG25*
2	Diaphragm	Rubber*
3	Bonnet	Cast iron GG25*
4	Union studs	Steel
5	Studs	Steel
6	Compressor	Cast iron GG25
7	Pin	Stainless steel
8	Stem	SS303
9	Stem nut	F212
10	Bearing	Standard
11	Greasing	Standard
12	Handwheel	Cast iron GG25*
13	Handwheel fix stud	F212
14	Indicator	Stainless steel

BODY MATERIAL	RUBBER MATERIAL	LINING
Cast iron GG25	Butyl (BU)	Antigraze rubber
Ductil iron GGG40	EPDM (EP)	Butyl
Ductil iron GGG50	Hypalon (HY)	Ebonite
AISI316 (CF8M)	Natural rubber (BL)	Halar (ECTFE)
AISI316L (CF3M)	Neopreno (NE)	Hypalon
AISI304 (CF8)	Nitrile (NBR)	Neopreno
AISI304L (CF3)	PTFE (TE)	Rilsal
ASTM A216/WCB	Reinforced butyl (BUR)	Teflon
Bronze	Silicone (SI)	
Chrome 30%	Viton (VI)	
Carpenter 20		

MAX.WORKING PRESSURES: 10Kg/cm2

reserved the right to modify the measures without previous notice